


The image features a stainless steel agitator with two curved blades, positioned vertically and surrounded by a dynamic, swirling blue liquid. The agitator is the central focus, with its shaft extending from the top towards the bottom. The liquid around it is in motion, creating a sense of energy and mixing. The background is a deep blue with lighter, swirling patterns that suggest the liquid's movement. The text 'MaxiMix' is overlaid on the image, with 'Maxi' in white and 'Mix' in yellow. A white, stylized circular graphic element surrounds the text.

MaxiMix

Powerfull agitator

MaxiMix -P100 series


Medium speed agitator

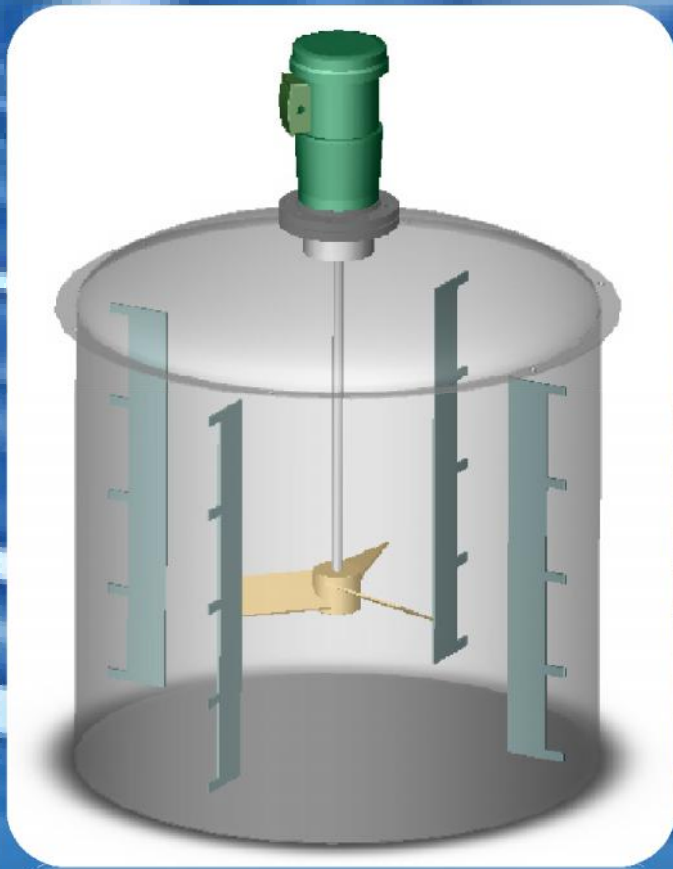

3 Vanes agitator
producing high agitation effect
combining axial and radial flow
Viscosity up to 100 cps
Speed 300 rpm
Capacity Range 200 – 50.000 L
0.15 – 20 HP available

MaxiMix –P100 series

Medium speed agitator

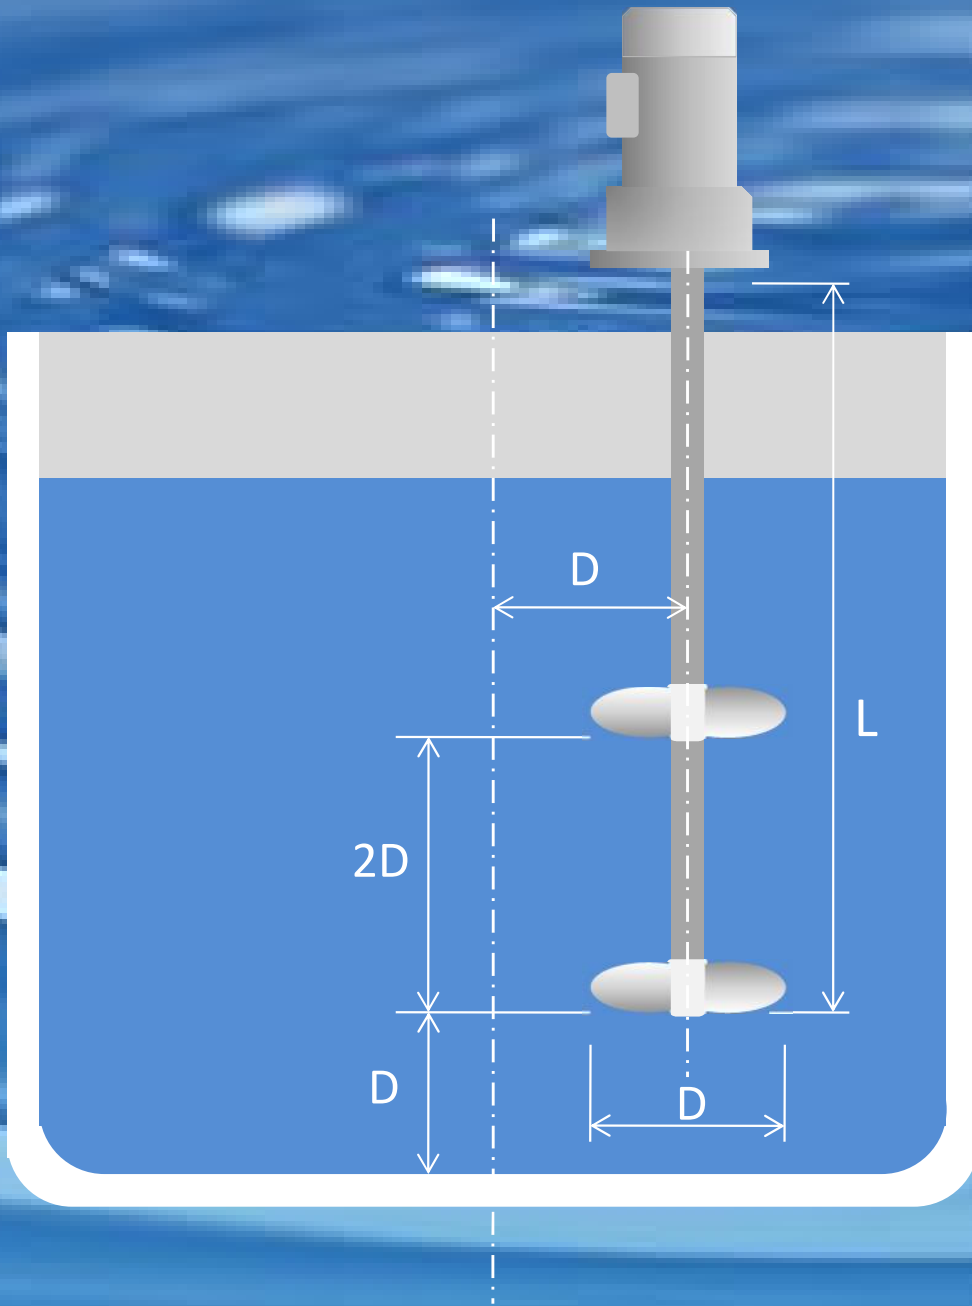

APPLICATION :

- ✓ **Water Treatment**
- ✓ **Food Industry**
- ✓ **Pulp & Paper Industry**
- ✓ **Textile Industry**
- ✓ **Paint Coating Industry**

L = Shaft length

D = Vane Diameter

MaxiMix -P100 series


Medium speed agitator

Printed 2017-R3

MODEL	MOTOR	SPEED	SHAFT DIAMETER	SHAFT LENGTH	1st PROPELLER DIAMETER	2nd PROPELLER DIAMETER (Optional)	Viscosity Max. 20 cps Max Vol.	Viscosity Max. 100 cps Max. Vol.
P100-015	0.15 HP	300 RPM	13 mm	600 mm	200 mm	160 mm	400 L	200 L
P100-020	0.2 HP	300 RPM	16 mm	1000 mm	250 mm	200 mm	1000 L	400 L
P100-050	0.5 HP	300 RPM	22 mm	1200 mm	300 mm	250 mm	2000 L	800 L
P100-100	1 HP	300 RPM	22 mm	1400 mm	350 mm	300 mm	5000 L	1500 L
P100-200	2 HP	300 RPM	35 mm	1600 mm	400 mm	350 mm	10000 L	3000 L
P100-300	3 HP	300 RPM	35 mm	1800 mm	450 mm	400 mm	12000 L	4000 L
P100-400	4 HP	300 RPM	40 mm	2000 mm	500 mm	450 mm	15000 L	5000 L
P100-600	6 HP	300 RPM	50 mm	2000 mm	550 mm	500 mm	30000 L	10000 L
P100-750	7.5 HP	300 RPM	55 mm	2200 mm	600 mm	550 mm	20000 L	8000 L
P100-1000	10 HP	300 rpm	60 mm	2500 mm	600 mm	550 mm	40000 L	10000 L

MaxiMix – P200 Series


Low Speed agitator

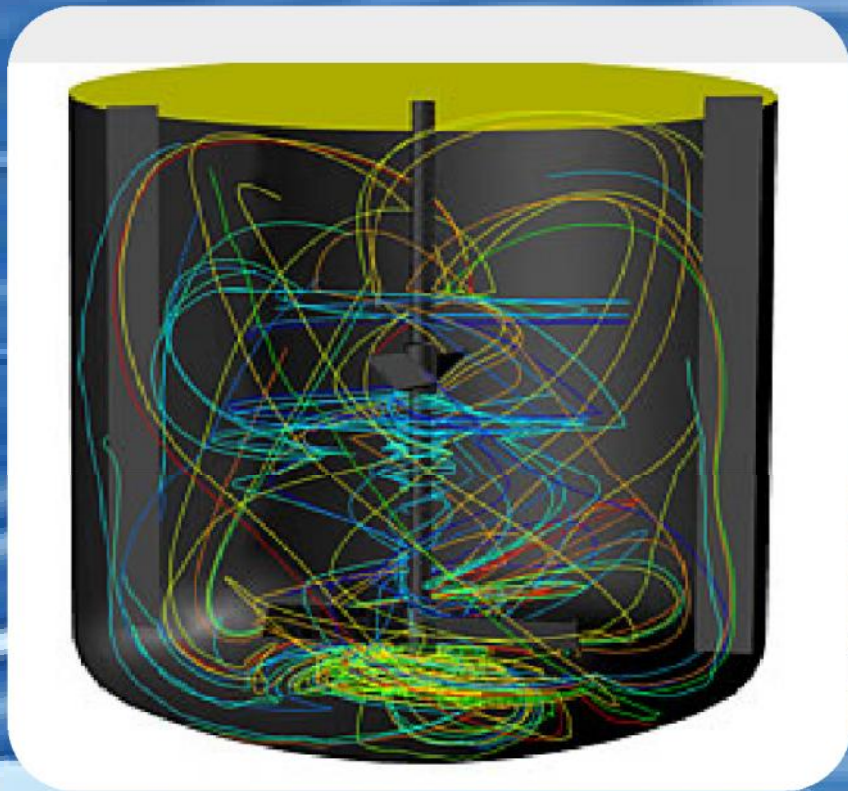

Twin blade
For slow agitation of
Viscosity up to 1500 cps
Speed 30 - 75 rpm
Capacity Range : 300 – 10.000 L
0.15 – 2 HP available

MaxiMix -P200 series

Low speed agitator

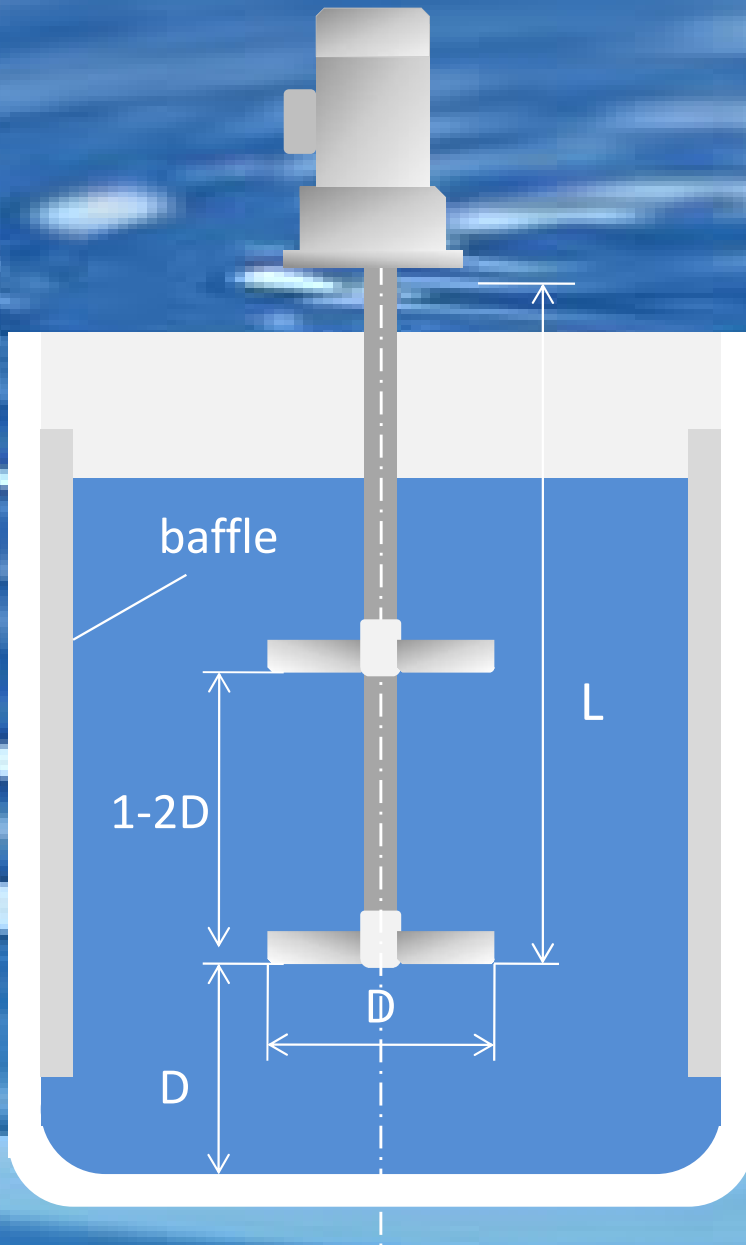

APPLICATION :

- ✓ **Water Treatment**
- ✓ **Food Industry**
- ✓ **Pulp & Paper Industry**
- ✓ **Textile Industry**
- ✓ **Paint Coating Industry**

L = Shaft length

D = Blade Diameter

MaxiMix –P200 series

Low Speed agitator

Printed 2017-R3

MODEL	MOTOR	SPEED	SHAFT DIAMETER	SHAFT LENGTH	1st & 2nd STAGE Vane Dia	Viscosity Max. 20cps Max. Vol	Viscosity Max.1500 cps Max. Vol
P200-015L	0.15 HP	30 RPM	16 mm	1000 mm	500 mm	600 L	300 L
P200-015M	0.15 HP	75 RPM	16 mm	1000 mm	300 mm	600 L	300 L
P200-025L	0.25 HP	30 RPM	22 mm	1200 mm	550 mm	1200 L	600 L
P200-025M	0.25 HP	75 RPM	22 mm	1200 mm	350 mm	1200 L	600 L
P200-050L	0.5 HP	30 RPM	22 mm	1200 mm	650 mm	2500 L	1200 L
P200-050M	0.5 HP	75 RPM	22 mm	1200 mm	500 mm	2500 L	1200 L
P200-100L	1 HP	30 RPM	32 mm	1500 mm	800 mm	5000 L	2500 L
P200-100M	1 HP	75 RPM	32 mm	1500 mm	600 mm	5000 L	2500 L
P200-200L	2 HP	30 RPM	45 mm	2000 mm	900 mm	10000 L	5000 L
P200-200M	2 HP	75 RPM	45 mm	2000 mm	700 mm	10000 L	5000 L
P200 -300L	3 HP	30 RPM	60 mm	2500 mm	1000 mm	12500 L	7500 L
P200 -300M	3 HP	75 RPM	60 mm	2500 mm	750 mm	12500 L	7500 L



MaxiMix

Powerfull agitator

For Inquiry please contact :

PT. AXIA MULTI SARANA

Graha Mas Fatmawati A9

Jl. RS Fatmawati 71, Jakarta 12150 INDONESIA

Phone : +62 21 72784035 Fax : +62 21 72784029

Email : axia_m_s@cbn.net.id

www.axia-multi-sarana.com